

LOW PRESSURE COMPRESSORS

325 Kubota Air Compressor Package

AC325KES-ASSY

Model AC325KES-ASSY Air Compressor package includes the Quincy 325 compressor and is driven by a Kubota OC95 air-cooled diesel engine. The Kubota OC95 is one of the few small air-cooled engines on the market today that conforms to the U.S. E.P.A. Regulation for non-road compression-ignition engines.

Compressor

- Quincy 325 Climate Control
- Single Stage Two-Cylinder
- 24.60 ft.³ Displacement
- 19.20 ft.³ Free Air Delivery
- 150 PSI Set Air Pressure

Engine


- Kubota OC95
- 9.5 HP at 3600 RPM
- Pull Start
- Electric Start (Standard)

Options

- Powder Coated Frame
- Enclosed Belt Guard

Standard Unit Specifications

- Isolated Inner Base
- Electric and Pull Start
- Stainless Steel Surge Tank
- 8 Gallon Aluminum Fuel Tank
- Heavy-Duty Brass Plumbing
- Stainless Steel Hardware
- Stainless Steel Pressure Gauge
- Relief Valve
- Aluminum Frame
- Aluminum Belt Guard
- Aluminum Handles
- Wheels
- Compressor - Primed and Painted

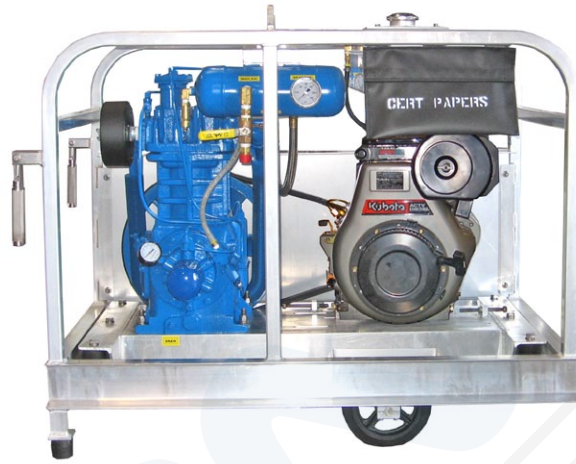

Specifications

Dimensions 46 in. L x 28 in. W x 38 in. H

Weight 450 lbs

325 Yanmar Air Compressor Package

AC325Y-ASSY

Model AC325Y-ASSY Air Compressor package is designed as a compact, light-weight unit. The Quincy 325 compressor is driven by a Yanmar diesel engine. The unit is built in an all aluminum frame with an isolated inner base and dual pad eyes.

Compressor

- Quincy 325 Climate Control
- Single Stage Two-Cylinder
- 24.60 ft.³ Displacement
- 19.20 ft.³ Free Air Delivery
- 150 PSI Set Air Pressure

Engine


- Yanmar L100 EE-D
- 10 HP
- 4 Cycle
- Single Cylinder
- Pull Start

Options

- Electric Start
- Powder Coated Frame

Standard Unit Specifications

- Isolated Inner Base
- Pull Start
- 1.5 Gallon Fuel Tank
- Stainless Steel Hardware
- Stainless Steel Pressure Gauge
- Relief Valve
- Aluminum Frame
- Aluminum Belt Guard
- Aluminum Handles
- Wheels
- Compressor - Primed and Painted
- Enclosed Belt Guard
- Aluminum Fuel Tank
- Hatz Engine

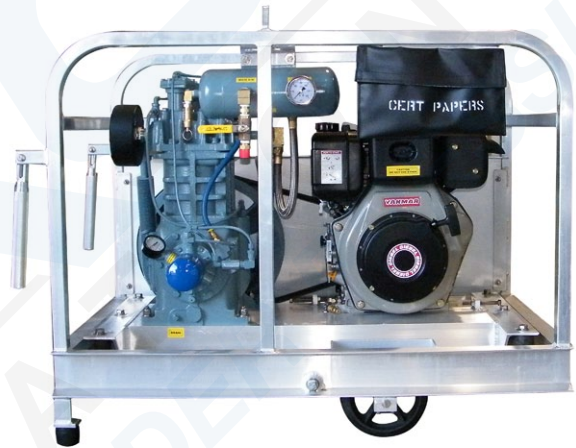

Specifications

Dimensions 46 in. L x 28 in. W x 38 in. H

Weight 450 lbs

Low Pressure Air Compressor

SEE BELOW


The QR- 25 series is the diving industry standard when it comes to reliability and performance. It's slow speed operation requires less maintenance and produces more CFM per horsepower. Standard features on models 325 through 5120 include spin-on oil filter and integral finned tube intercooler.

Order Information - Single Stage

Model No	HP at 100 PSI	No. Cyl.	Bore	Stroke	Min RPM	CFM/FAD at 100 PSI Min RPM	Max RPM	CFM/FAD at 100 PSI Max. RPM	Max. Cont. Pressure	Max Intermittent Pressure	Weight
216	1-1/2-5	2	3	2.5	400	4.74	900	10.7	100	100	165
214	3-7-1/2	2	4	3	400	10.47	900	23.56	100	100	247

Order Information - Two Stage

Model No	HP at 175 PSI	No. Cyl.	Bore LP	Bore HP	Stroke	Min. RPM	CFM/FAD at 175 PSI Min RPM	Max RPM	CFM/FAD at 100 PSI Max RPM	Max. Cont. Pressure	Max Intermittent Pressure	Weight
216	3-5	2	3	2.5	3	400	8.28	900	18.64	200	250	255
214	5-15	2	4	3.25	3.5	400	15.58	940	36.6	200	250	480
325	7-1/2-20	2	4.5	4	4	400	29.45	940	69.21	200	250	739
350	10-25	2	6	3.25	3.25	400	36.53	1040	94.97	200	250	904



5120 TWO STAGE



240 SINGLE STAGE