


PRODUCT DETAILS:	
Max Length Filled	- 5.0m
Max Diameter Filled	- 2.3m
Max Height Filled	- 3.4m
Masterlink Centres	- 0.29m
Product Weight	- 120kg Approx

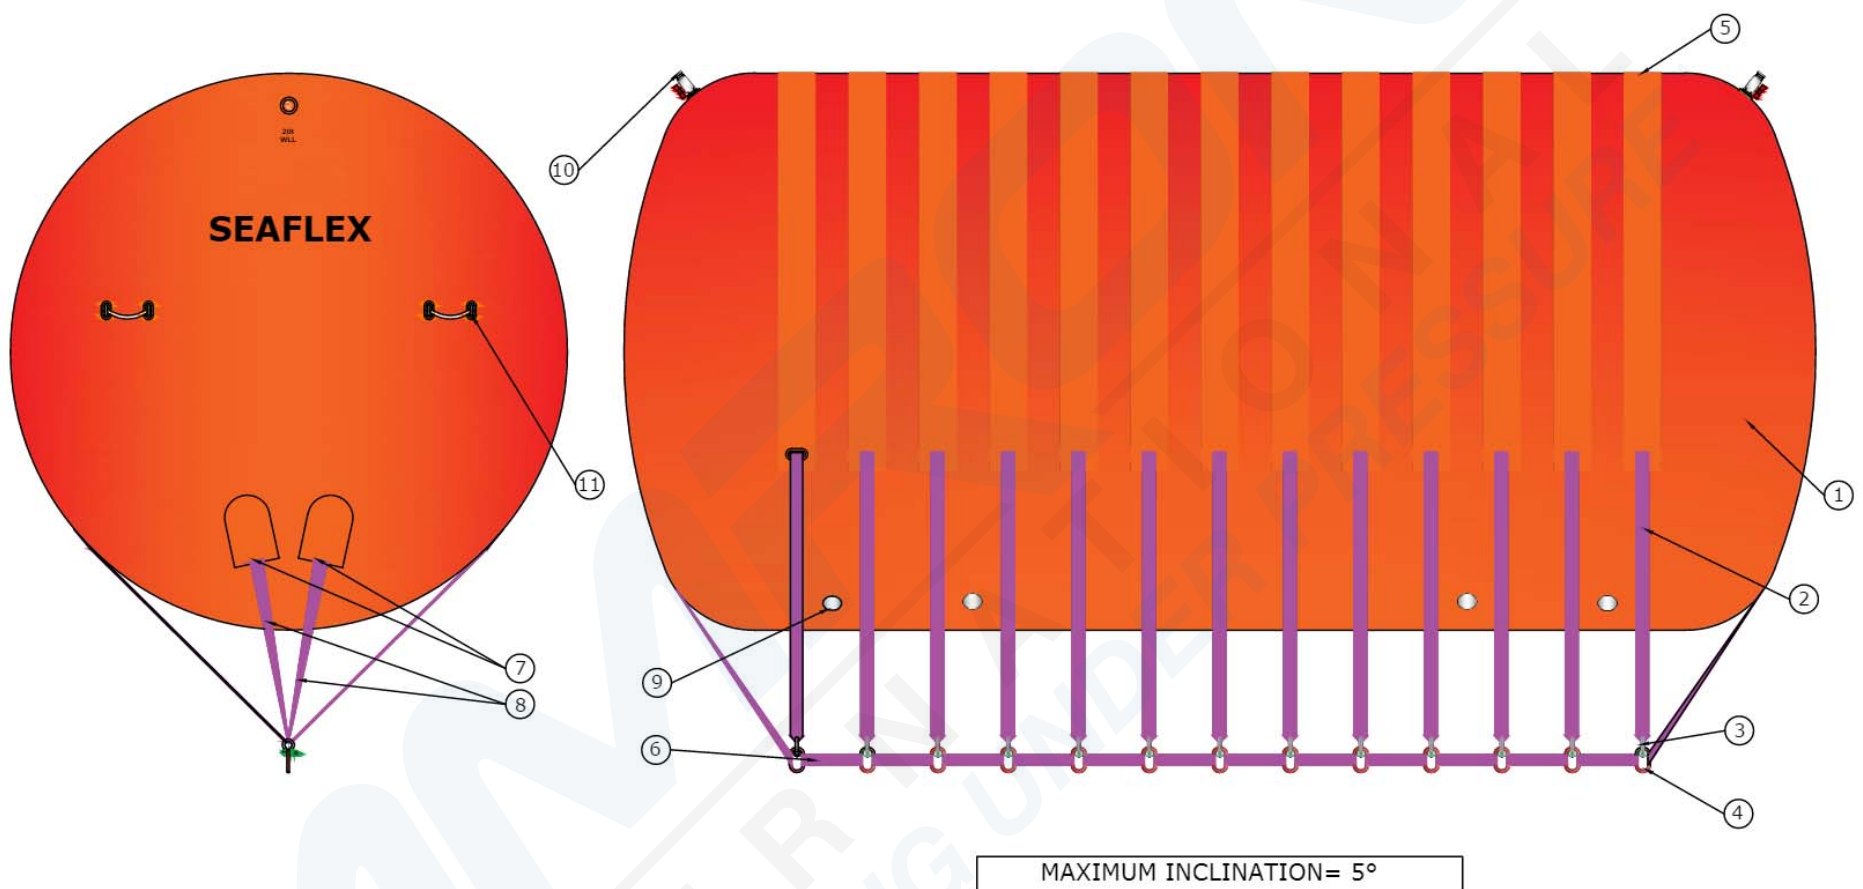

20t Inflatable Buoyancy Unit Component List			
Item Number	Component Title	Component Description	QTY Per Unit
1	Canopy	Heavy Duty PVC coated Polyester Base Cloth	1
2	Main Strop	Polyester Sling Webbing	13
3	Shackles	Galvanised Green Screw Pin Shackles	13
4	Masterlink	Masterlink Assembly	13
5	Shackles	Galvanised Green Screw Pin Shackles	13
6	Centre Link Strop	Polyester Sling Webbing	1
7	Strop bar	Heat Treated Cast Aluminium Strop bar	4
8	End Strop	Polyester Sling Webbing	4
9	PRV	Pressure Relief Valve	8
10	Inflation Port	3/4" Skin Fitting with quarter turn Globe Valve, terminating in 3/4" Camlock	2
11	Rope Handle	Handling Point	4

For fixing to Pipes, Provide 13 Attachments at Centres Shown

IBUs should be used for loads on the surface or seabed; not for lifting upwards through the water column.

The Intellectual Property of this drawing belongs wholly to Unique Seaflex Ltd, and may not be copied or republished without permission. Contents are accurate at time of issue, but may be subject to change without notice

REV	DATE	DESCRIPTION	BY	CHECKED	DATE
01	15.07.15	Initial Issue			

Unique SEAFLEX
A Unique Maritime Group Company

SEAVIEW ROAD
COWES
ISLE OF WIGHT
ENGLAND
PO31 7US

TEL: +44 1983 290 525
www.uniquegroup.com

DRAWING TITLE	SCALE
20t Inflatable Buoyancy Unit Specification Sheet	N.T.S @ A3
PROJECT NUMBER	DRAWN
Inflatable Buoyancy Unit (IBU)	GJP
DRAWING No.	REVISION
20t - IBU - SS	01