

# 26-1200 Series

## Regulators - Pressure Reducing

D26120540X012

### Specifications

For other materials or modifications, please consult TESCOM.

#### OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

##### Maximum Inlet Pressure

3600 and 6000 psig  
248 and 414 bar

##### Outlet Pressure

To maximum inlet

##### Design Proof Pressure

150% maximum rated operating

##### Leakage

Bubble-tight

##### Flow Capacity

$C_v = 3.3, 6.0, \text{ or } 12.0^*$

#### MEDIA CONTACT MATERIALS

##### Body

303, 316 Stainless Steel

##### Seat

CTFE or Vespel®

##### Diaphragm

Buna-N or Viton®

##### O-Rings

Buna-N or Viton®

##### Back-up Rings

Teflon®

##### Remaining Parts

300 Series Stainless Steel

#### OTHER

##### Cleaning

CGA 4.1 and ASTM G93

Teflon®, Tefzel®, Vespel®, and Viton® are registered trademarks of E.I. du Pont de Nemours and Company.

\*A secondary pressure drop due to the outlet cross-hole can significantly affect the rated flow capacity. Contact TESCOM for flow curve data when outlet pressure is less than 1000 psig / 69.0 bar.




TESCOM 26-1200 Series dome loaded, high flow pressure reducing regulator is externally loaded with 6000 psig / 414 bar maximum inlet and outlet pressures. The 26-1200 Series offers three orifice sizes and  $C_v$  ratings, balanced main valve, and available external sensing.

#### Applications

- Rocket engine testing
- Fueling
- Facilities supply

#### Features and Benefits

- Diaphragm sensed and highly sensitive
- Modular construction for easy service
- External sensing available for improved accuracy
- Balanced main valve increases seat life
- Mounts in any position
- Low droop and lockup

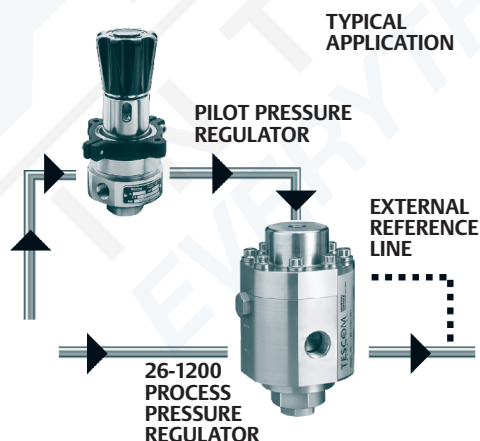

## 26-1200 Series Regulator Specifications

### **C<sub>v</sub> = 3.3**

#### OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

##### Maximum Inlet Pressure

**Stainless Steel Body:**  
6000 psig / 414 bar

##### Operating Temperature\*

-40°F to 165°F / -40°C to 74°C

##### Flow Capacity

C<sub>v</sub> = 3.3

#### MEDIA CONTACT MATERIALS

##### Body

303 or 316 Stainless Steel

##### Seat

CTFE or Vespel®

##### Diaphragm

Buna-N

##### O-Rings

Buna-N

##### Back-up Rings

Teflon®

##### Gasket

CTFE

##### Retaining Ring

15-7 Stainless Steel

##### Valve Cap

17-4 Stainless Steel

##### Remaining Parts

300 Series Stainless Steel

#### OTHER

##### Weight

**Stainless Steel:** 25 lbs / 11.3 kg

### **C<sub>v</sub> = 6.0**

#### OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

##### Maximum Inlet Pressure

**Vespel:** 6000 psig / 414 bar  
**CTFE or Tefzel®:** 3600 psig / 248 bar

##### Operating Temperature\*

**Buna-N:** -40°F to 165°F / -40°C to 74°C  
**Viton®:** -15°F to 165°F / -26°C to 74°C

##### Flow Capacity

C<sub>v</sub> = 6.0

#### MEDIA CONTACT MATERIALS

##### Body

316 Stainless Steel

##### Seat

CTFE or Vespel®

##### Diaphragm

Buna-N or Viton®

##### O-Rings

Buna-N or Viton®

##### Back-up Rings

Teflon®

##### Connecting Rod

17-4 Stainless Steel

##### Valve

Nitronic 60

##### Remaining Parts

300 Series Stainless Steel

#### OTHER

##### Weight

**Stainless Steel:** 40 lbs / 18.1 kg

### **C<sub>v</sub> = 12.0**

#### OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

##### Maximum Inlet Pressure

6000 psig / 414 bar

##### Operating Temperature\*

-15°F to 165°F / -26°C to 74°C

##### Flow Capacity

C<sub>v</sub> = 12.0

#### MEDIA CONTACT MATERIALS

##### Body

316 Stainless Steel

##### Seat

Vespel®

##### Diaphragm

Viton®

##### O-Rings

Viton®

##### Back-up Rings

Teflon®

##### Valve

Nitronic 60

##### Remaining Parts

300 Series Stainless Steel

#### OTHER


##### Weight

**Stainless Steel:** 60 lbs / 27.2 kg


\*For extended temperature applications, consult TESCOM.

## 26-1200 Series Regulator Drawings


### $C_v = 3.3 - 1/2" [12.7]$ ORIFICE

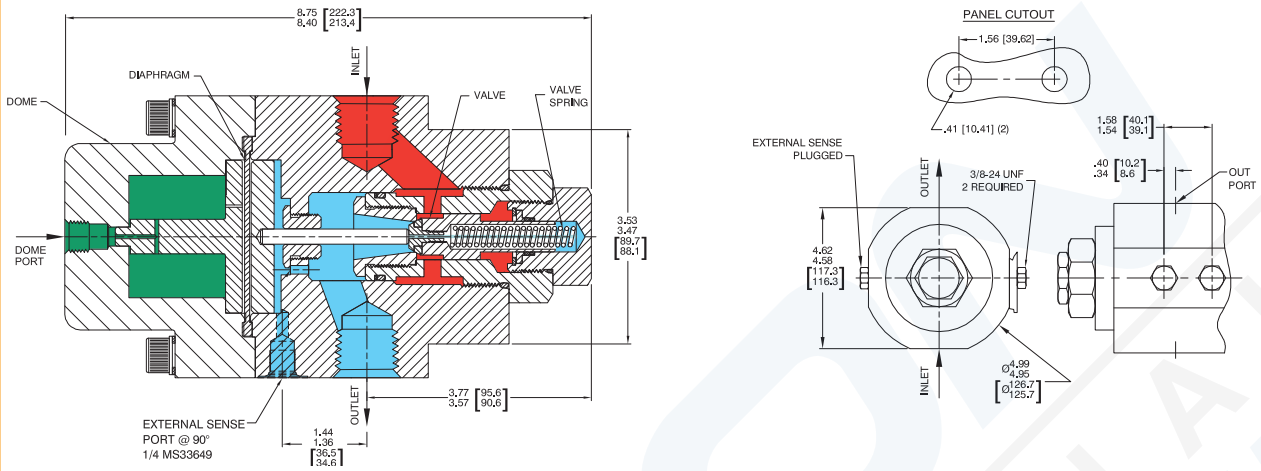

### $C_v = 6.0 - 5/8" [15.9]$ ORIFICE

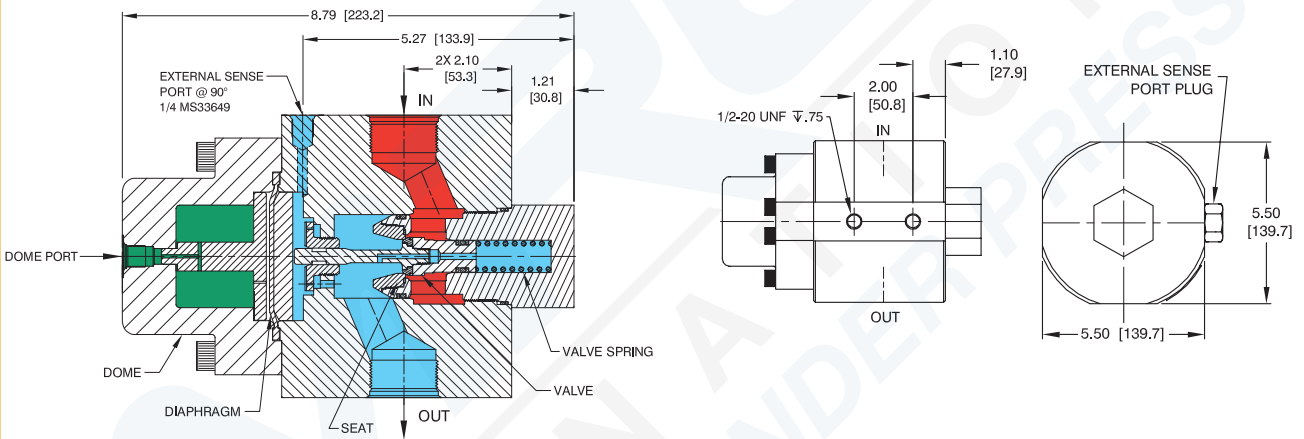

### $C_v = 12.0 - 1" [25.4]$ ORIFICE

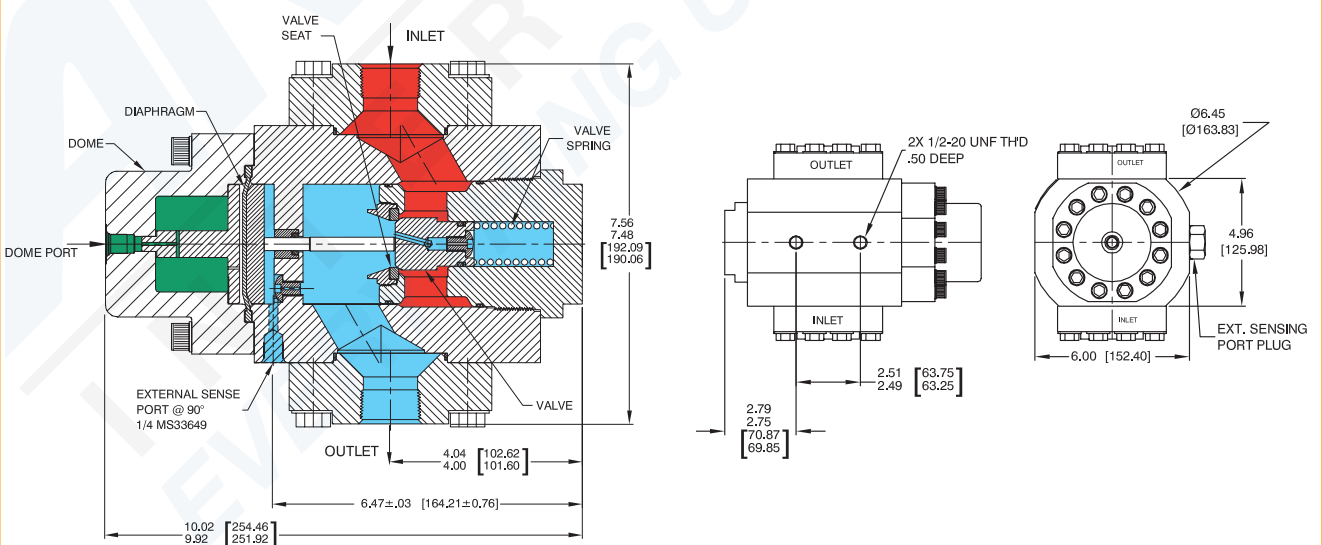


All dimensions are reference & nominal  
Metric [millimeter] equivalents are in brackets

### 26-1200 Series Regulator Flow Chart

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on [www.tescom.com](http://www.tescom.com).

$C_v = 3.3$


Model No. 26-1261-3161

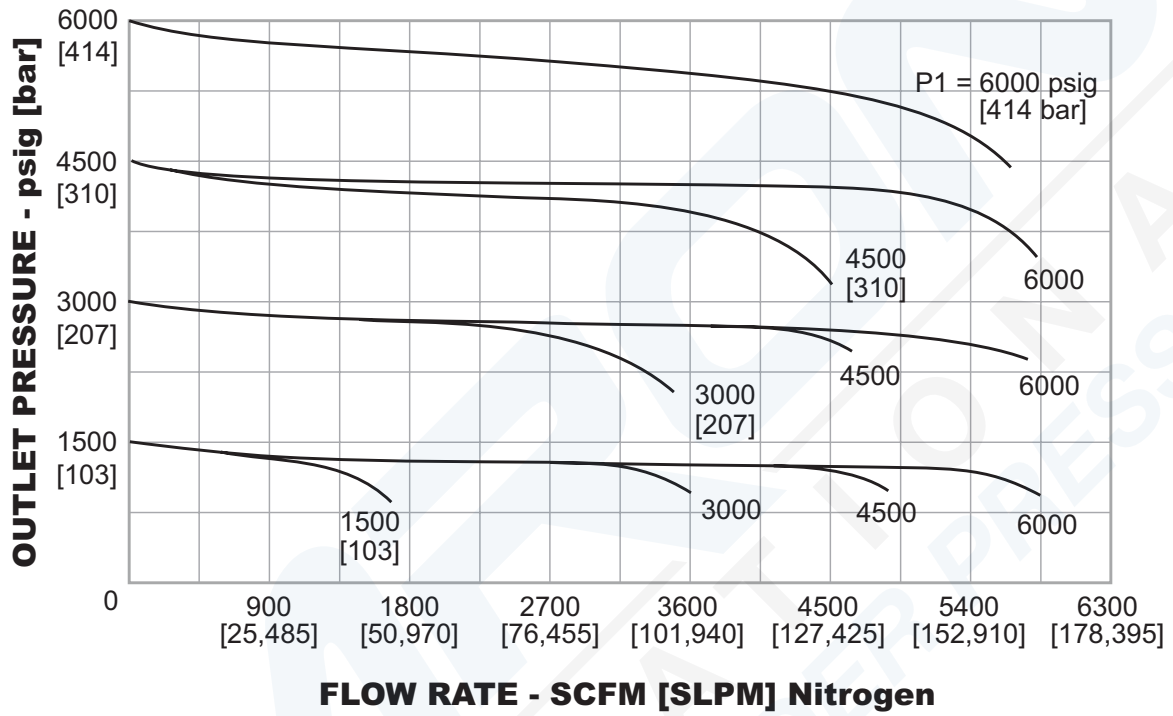


## 26-1200 Series Regulator Flow Charts

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on [www.tescom.com](http://www.tescom.com).

**C<sub>v</sub> = 6.0**

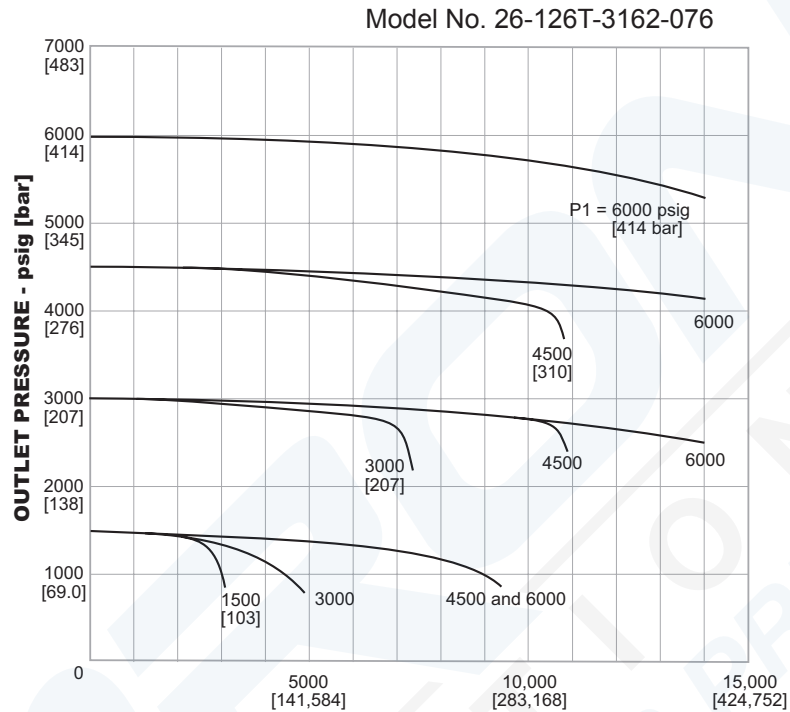

**C<sub>v</sub> = 12.0**

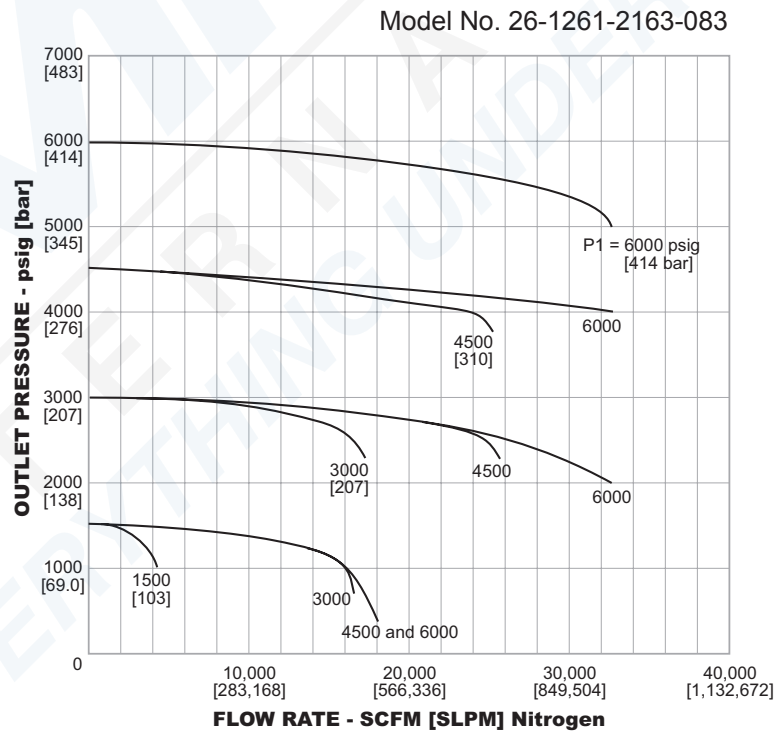

The curves above were generated using analytical methods - error is estimated at ±10%

## 26-1200 Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

$C_v = 3.3$

26-12      2                      1      -                      3                                      16                      1

BASIC SERIES	BODY MATERIAL	LOADING METHOD	INLET AND OUTLET PORT TYPE	DOME PORT	PORT SIZE	ORIFICE SIZE
26-12	2 – 303 Stainless Steel 6 – 316 Stainless Steel	1 – External	1 – SAE 2 – NPTF 3 – MS33649	1/4" MS33649 1/4" NPTF 1/4" MS33649	12 – 3/4" 16 – 1"	1 – 1/2" 12.7 mm

$C_v = 6.0$

26-12      6                      T                      -                      3                                      16                      2      -      076

BASIC SERIES	BODY MATERIAL	DIAPHRAGM/O-RING	SEAT	TEMPERATURE	INLET AND OUTLET PORT TYPE	DOME PORT	INLET AND OUTLET PORT SIZE	INNER VALVE SIZE	MOD. NUMBER
26-12	6 – 316 Stainless Steel	A – Buna-N B – Buna-N D – Buna-N E – Viton® T – Viton® V – Viton® W – Viton®	Vespel® SP1 Vespel® SP21 CTFE Vespel® SP1 CTFE Vespel® SP21 Tefzel®	-40°F to 165°F -40°C to 74°C -40°F to 165°F -40°C to 74°C -15°F to 300°F -26°C to 149°C -15°F to 165°F -26°C to 74°C -15°F to 300°F -26°C to 149°C -15°F to 165°F -26°C to 74°C	1 – SAE 2 – NPTF 3 – MS33649	1/4" MS33649 1/4" NPTF 1/4" MS33649	12 – 3/4" * 16 – 1" 20 – 1-1/4" SAE or MS only	2 – 5/8" 15.9 mm	076

MANDATORY FOR  $C_v = 6.0$

\*3/4" ports reduce overall  $C_v$  to 5.0

$C_v = 12.0$

26-12      6                      1      -                      2                                      16                      3      -      083

BASIC SERIES	BODY MATERIAL	LOADING METHOD	INLET AND OUTLET PORT TYPE	DOME PORT	INLET AND OUTLET PORT SIZE	SENSE TYPE	MODEL NUMBER
26-12	6 – 316 Stainless Steel	1 – External	1 – SAE 2 – NPTF 3 – MS33649	1/4" MS33649 1/4" NPTF 1/4" MS33649	16 – 1" 20 – 1-1/4"	3 – Internal 4 – External	083

MANDATORY FOR  $C_v = 12.0$  MODEL



**WARNING!** Do not attempt to select, install, use or maintain this product until you have read and fully understood the TESCOM Safety, Installation and Operation Precautions.